


Accessories  
**ProAcc ZP-FH**  
 40mm Busbar Fuse Holder

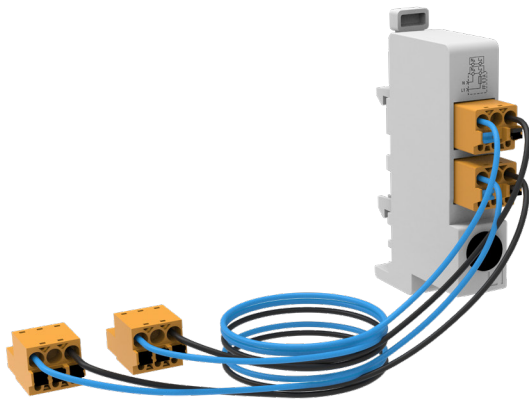

**Location of Use:** Main Distribution Boards,  
 N and L1 Busbars of 40mm Busbar  
 System 12x5mm

**Load terminals:** L1 protected by Class FF fuse link

**Compliance:** IEC 61984  
 EN 61984  
 DIN VDE 0603-1  
 VDE-AR-N 4100

**Technical Data**

**ProAcc ZP-FH**

**IEC Electrical**

Rated Voltage (AC)	$U_N$	240V
Rated Current	$I_N$	6.3A
Rated Impulse Voltage	$U_{imp}$	4kV
Short Circuit Interrupt Capability		25kA
Fuse Link		FF, 5 x 20 mm, 6.3A

**Cable Set Information**

Rated Current	$I_N$	9.5A
Rated Isolation Voltage		6kV
Rated Short Circuit Current		25kA
Type of Connection		Load side: Plug BLF 5.08 / Fuse holder side: Plug SLF 5.08
Connection Cable Length		Modem: 80cm / Gateway: 115cm
Cable Cross Section		0.82 mm <sup>2</sup> (Stranded)


**Mechanical & Environmental**

Pollution degree		2
Operating Temperature Range	$T_a$	-13 °F to +131 °F [-25 °C to +55 °C]
Permissible Operating Humidity	RH	5%...95%
Altitude (max)		13123 ft [4000m]
Mounting		N and L1 Busbars 40mm Busbar System 12x5mm
Wire Connection Method		2x Push In Plugs
Conductor Cross Section (max)		2.5mm <sup>2</sup> [12 AWG] (Solid, Flexible)
Degree Of Protection		IP 00 IP20 when installed behind the protective cover
Housing Material		Thermoplastic: Extinguishing Degree UL 94 V-0

**Order Information**

Order Code		
ProAcc ZP-FH (with cable set)		515 751

**Dimensions & Packaging** inches [mm]

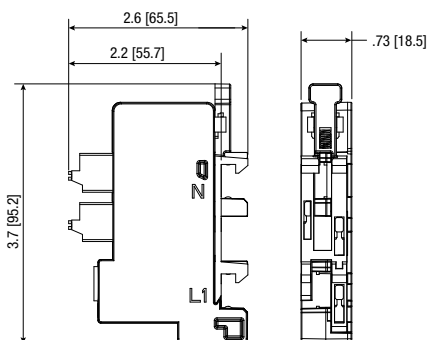

**Complete Unit Dimensions & Packaging**

<b>ProAcc ZP-FH</b>		
Weight	pounds [grams]	.30 [136]
Packaging Dimensions (HxWxL)		3.6x1.4x4.7"
		93x38x120mm
Standard Order Quantity		1 Unit

*Information contained in this document is subject to change at any time without notice.*

